Technical Specifications

Mechanical

Mounting: Directly on a 30mm diameter solenoid in horizontal or ver tical orientation with adaptor or wall mounting by four screws. Required accessories provided.

- Dust and water tight, to IP67 and NEMA 4X.
- Operating temperature: -10o to 60oC
- Integrated four keys keypad.

Electrical

Batteries: One 9V alkaline battery. Use top quality type to ensure at least one year's autonomous operation.

- Backup memory
- Low battery warning
- Power saving LCD

24 hours real time clock
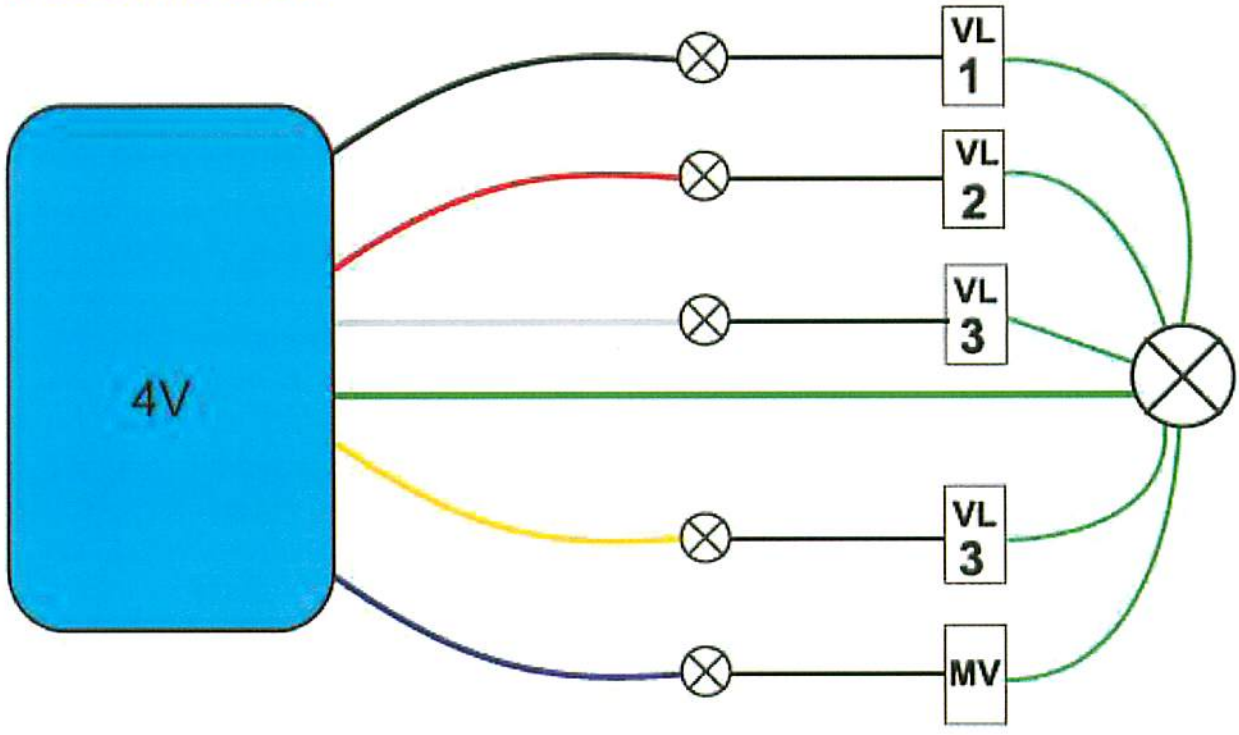
Installation