


## Technical Data

- Clever, simple 3 parts Hydraulic Control Valve.
- Available in 2 1/2", 3", 3"S, 4", 5".
- Non metal wetted parts.
- Superior modulating stability and accuracy.
- Rubber diaphragm single moving part.
- Straight flow design.
- Pressure rating PN-10 (150 PSI).
- Water temperature up to 60°C.

## Flow Charts

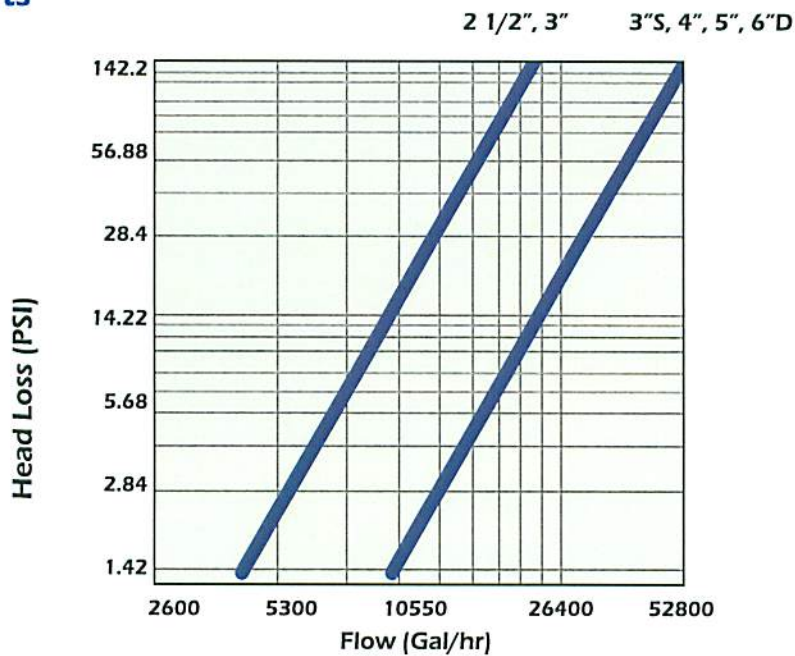

## Technical Specifications

	2" DN50	2.5" DN65	3" DN80	3"S DN80S	4" DN100	5" DN125
<b>Connections</b>	Threaded	Threaded Grooved	Threaded Grooved Flanged	Threaded	Threaded Flanged	Grooved
<b>CV Flow Coefficient</b>	90	90	90	200	200	200
<b>Minimum Working Pressure (psi)</b>	5	5	5	5	5	5